

Large Flush Wood NEXGEN-FYRE™ FIREPLACE INSERT

FIREPLACE
XTRORDINAIR
FIREPLACEX.COM




The Large Flush Wood Insert is shown with the Shadowbox™ Black Painted Face.

Our Cleanest Burning Large Wood Insert

Turn your old, inefficient fireplace into a clean burning, cost-effective, and reliable source of heat with a NexGen-Fyre™ Large Flush Wood Insert by Lopi®. Our wood burning insert features a sleek, flush design that does not extend out onto the hearth to offer a classic, finished look that will complement any décor. All inserts feature a big, beautiful fire viewing area and concealed convection fans that increase the transfer and circulation of heat throughout your home. NexGen-Fyre™ takes our non-catalytic wood burning technology to the next level! With NexGen-Fyre™, primary and secondary combustion are harnessed to create the ultimate blended combustion system. This produces beautiful, balanced fires with double the BTU range, up to 50% greater heat output, and longer burn times than any other non-catalytic technology.

Available in Arched or Rectangular Door Models.

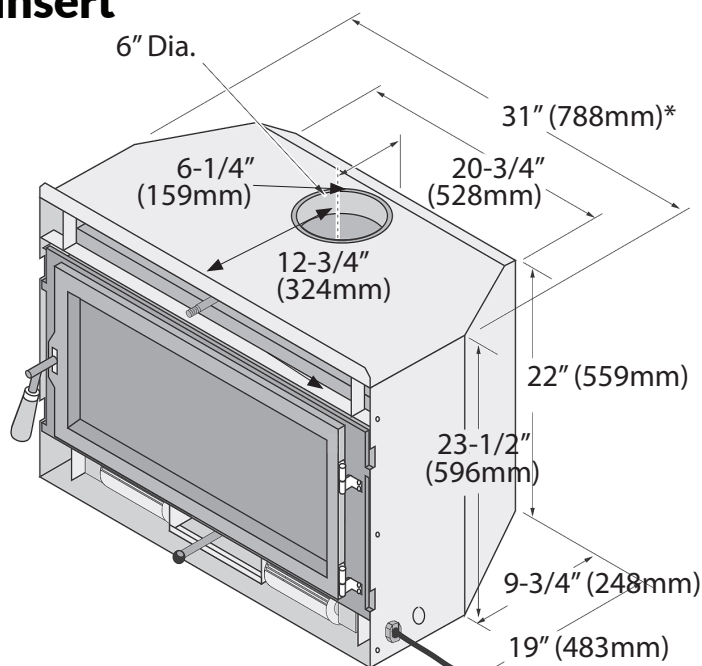

**GreenStart® igniter option requires additional firebox width measured 3" from front of fireplace opening.*

SPECIFICATIONS

Emissions: 1.7 Grams Per Hour (Cord Wood)

Heating Capacity:* 1,500 to 2,500 Square Feet

EPA Tested BTU Range: 17,900 to 66,736 BTU's Per Hour

Real World BTUs:

EPA tests to determine BTU output are achieved with a single load of wood at each burn rate. At home, you are likely to add more wood to your insert to maintain your desired comfort level. By the simple process of loading your fireplace insert with additional wood, you could achieve up to a 20% higher heat output than established during EPA testing.

Efficiency:** 73% HHV

Maximum Burn Time: Up to 12 Hours

Firebox Size: 3.0 Cubic Feet

Maximum Log Size: 24 Inches

Weight: 530 Pounds

Construction: 5/16" to 1/4" Steel Plate

Bypass Damper: Yes

Glass Viewing Area: 24-1/2" W x 13" H
(307 Sq. In. Arch, 319 Rect.)


**Heating capacity may vary depending on degree of home insulation, floor plan and ambient temperature zone of the area you live.*

***As tested using B-415.1 using Cord Wood. HHV = High Heat Value.*

OPTIONS

- Insert Wiring Kit
- **GREEN START** Igniter

CLEARANCES TO UNPROTECTED COMBUSTIBLES

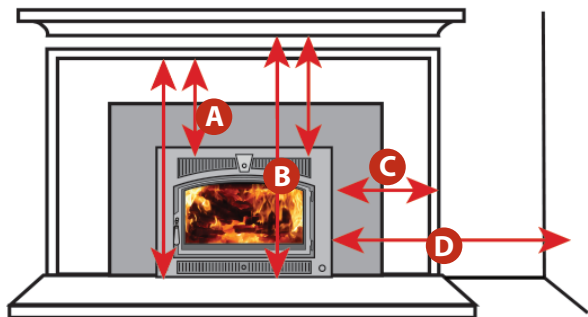

	Masonry	Metal (ZC)
A = Insert Base to Mantel	41"	41"
B = Insert Base to Top Facing	37"	37"
C = Firebox Side to Side Facing	5-1/2"	5-1/2"
D = Firebox Side to Side Wall	10-1/2"	10-1/2"

DOOR FACE OPTIONS



*Classic Arch™ Face
Metallic Black paint finish
35-1/4" W x 26-3/8" H*



*Artisan™ Hand-Forged,
Hand Hammered Face
Limited to stock on hand
New Iron paint finish
35-1/4" W x 26-3/8" H*




*Metropolitan™ Face
Metallic Black paint finish
35-3/8" W x 26-1/4" H*



*Shadowbox™ Face
Metallic Black paint finish
37-3/4" W x 25-1/8" H*

SIZING YOUR FIREPLACE FOR AN INSERT

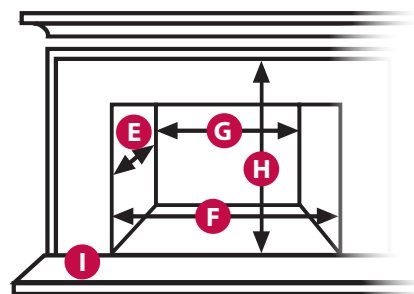

Your Fireplace Measurements

E = Depth _____
F = Front Width _____
G = Back Width _____
H = Height _____
I = Hearth Depth _____

Please use the provided chart above to mark down your fireplace dimensions. This will assist you in determining the right Lopi insert for your fireplace.

Approved ZC Fireplaces: Approved for Marco®, Majestic®, Heatilator®, Superior®, Preway® and Tempco® zero clearance fireplaces. See the Owner's Manual for details.